



Technical Data

Shoulder to shoulder Length (Less Bit)	797mm	31.38"
Weight (Less Bit)	25kg	55lbs
External Diameter	82mm	3.23"
Bit Shank	IR3.5	
Hole Range	90-110mm	
Connection Thread	API 2-3/8 Reg	

Air Consumption


PSI	C.F.M.	BAR	M ³ /min
150	185	10.3	5.2
200	257	13.8	7.9
250	325	17.2	9.2
300	409	20.7	11.7
350	490	24.1	13.9

Description

1	Top Sub (2-3/8 API Reg)
2	Top Sub O-ring
3	Check Valve
4	Check Valve Spring
5	Spacer Spring
6	Make Up Ring
7	Air Distributor
8	Air Distributor O-Ring
9	Cylinder
10	Piston
11	Case
12	Stop Ring
13	Bit Retainer
14	Bit Retainer O-Ring
15	Drive Chuck

SUMMIT35 G2 IR3.5

DTH HAMMER SERIES  Pinnacle
DRILLING PRODUCTS

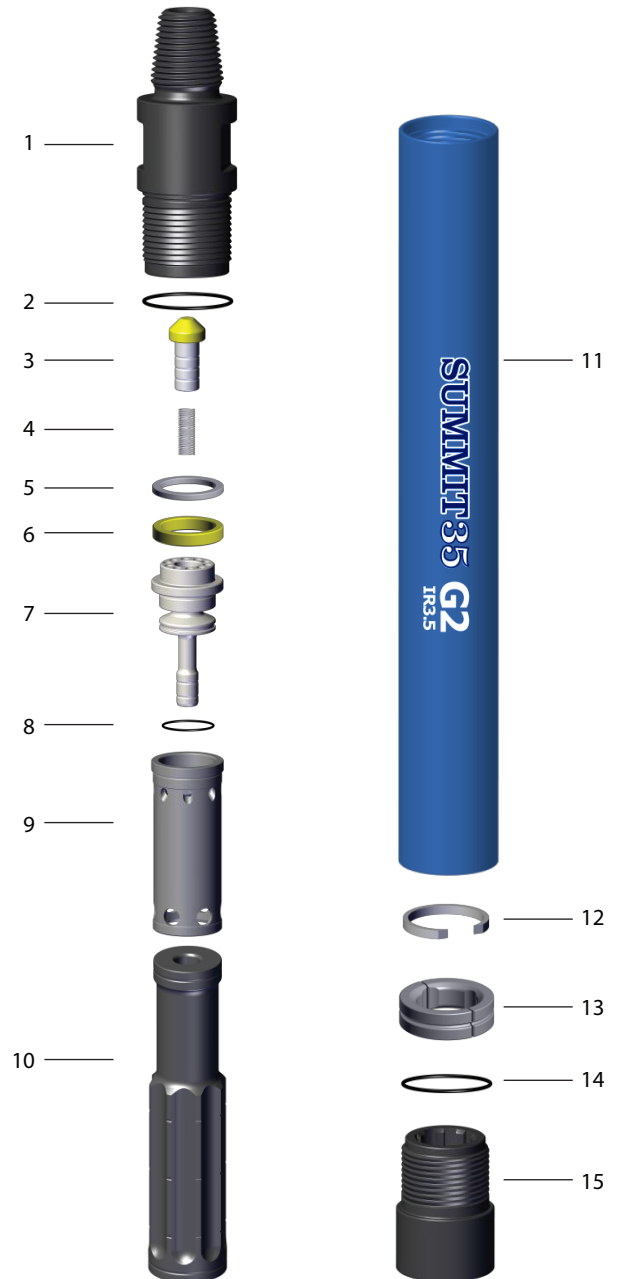

According to your request, the top sub can be made into two spanners, and come with protection buttons. An air controlling hole can be drilled on the valve to provide more efficient cuttings discharge.