



Technical Data

Shoulder to shoulder Length (Less Bit)	2173.5mm	85.6"
Weight (Less Bit)	6519.71kg	14373.5lbs
External Diameter	800mm	31.5"
Bit Shank	PD800	
Hole Range	36" - 46"	
Connection Thread	240 HEX	

Air Consumption


PSI	C.F.M.	BAR	M ³ /min
100	3030	7	85.8
150	4910	10.5	139
200	6920	14	195

Description

- | | |
|----|------------------------|
| 1 | Top Sub (HEX 300) |
| 2 | Top Sub O-ring |
| 3 | Top Sub Washer |
| 4 | Check Valve |
| 5 | Check Valve Spring |
| 6 | Spacer Ring |
| 7 | Disc Spring |
| 8 | Air Distributor |
| 9 | Air Distributor O-Ring |
| 10 | Cylinder |
| 11 | Piston |
| 12 | Case |
| 13 | Piston Retainer Ring |
| 14 | Stop Ring |
| 15 | Bit Retainer Ring |
| 16 | Bit Retainer O-Ring |
| 17 | Bearing |
| 18 | Driver Chuck Washer |
| 19 | Driver Chuck |

SUMMIT360 G2

DTH HAMMER SERIES  Pinnacle
DRILLING PRODUCTS

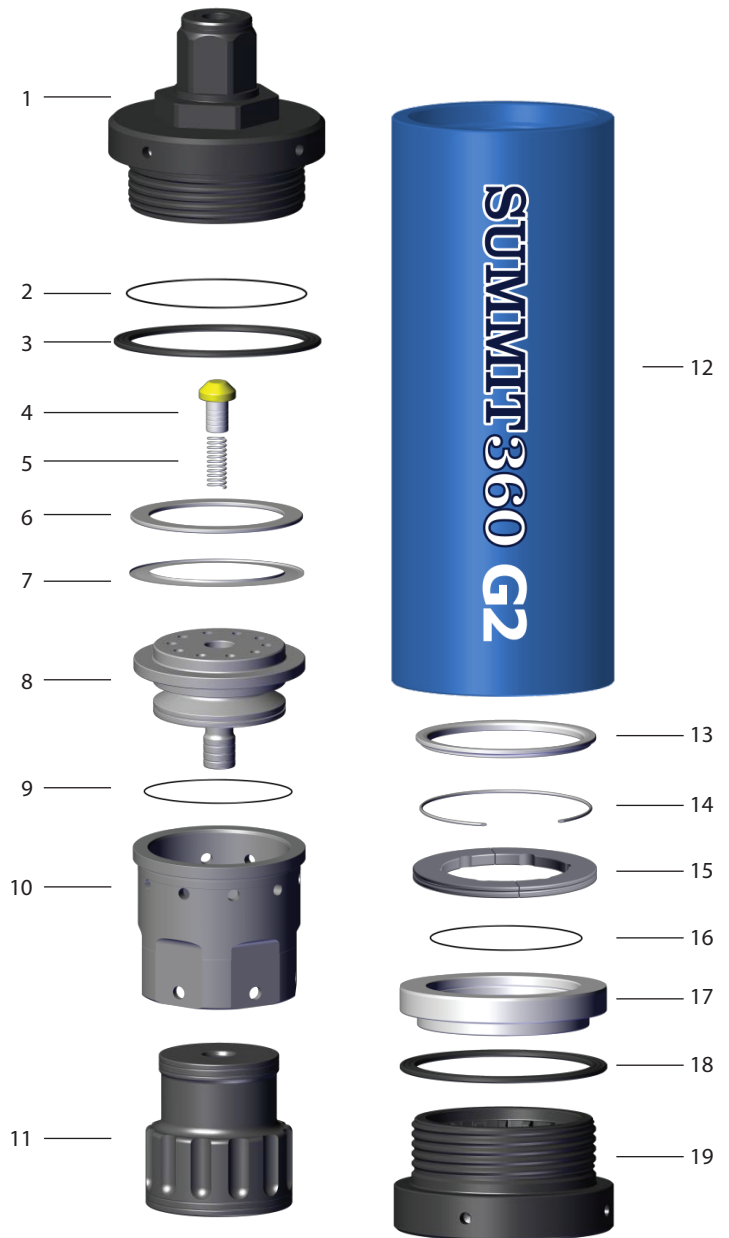

According to your request, the top sub can be made into two spanners, and come with protection buttons. An air controlling hole can be drilled on the valve to provide more efficient cuttings discharge.