



Technical Data

Shoulder to shoulder Length (Less Bit)	961mm	37.83"
Weight (Less Bit)	40kg	88lbs
External Diameter	98mm	3.86"
Bit Shank	IR340	
Hole Range	105-127mm	
Connection Thread	API 2-3/8 Reg	

Air Consumption


PSI	C.F.M.	BAR	M ³ /min
150	254	10.3	7.2
200	325	13.8	9.3
250	394	17.2	11.1
300	468	20.7	13.4
350	540	24.1	15.3

Description

1	Top Sub (2-3/8 API Reg)
2	Top Sub O-ring
3	Check Valve
4	Check Valve Spring
5	Spacer Ring
6	Make Up Ring
7	Air Distributor
8	Air Distributor O-Ring
9	Cylinder
10	Piston
11	Case
12	Stop Ring
13	Bit Retainer Ring
14	Bit Retainer O-Ring
15	Driver Chuck

SUMMIT40 G2 IR340

DTH HAMMER SERIES Pinnacle DRILLING PRODUCTS

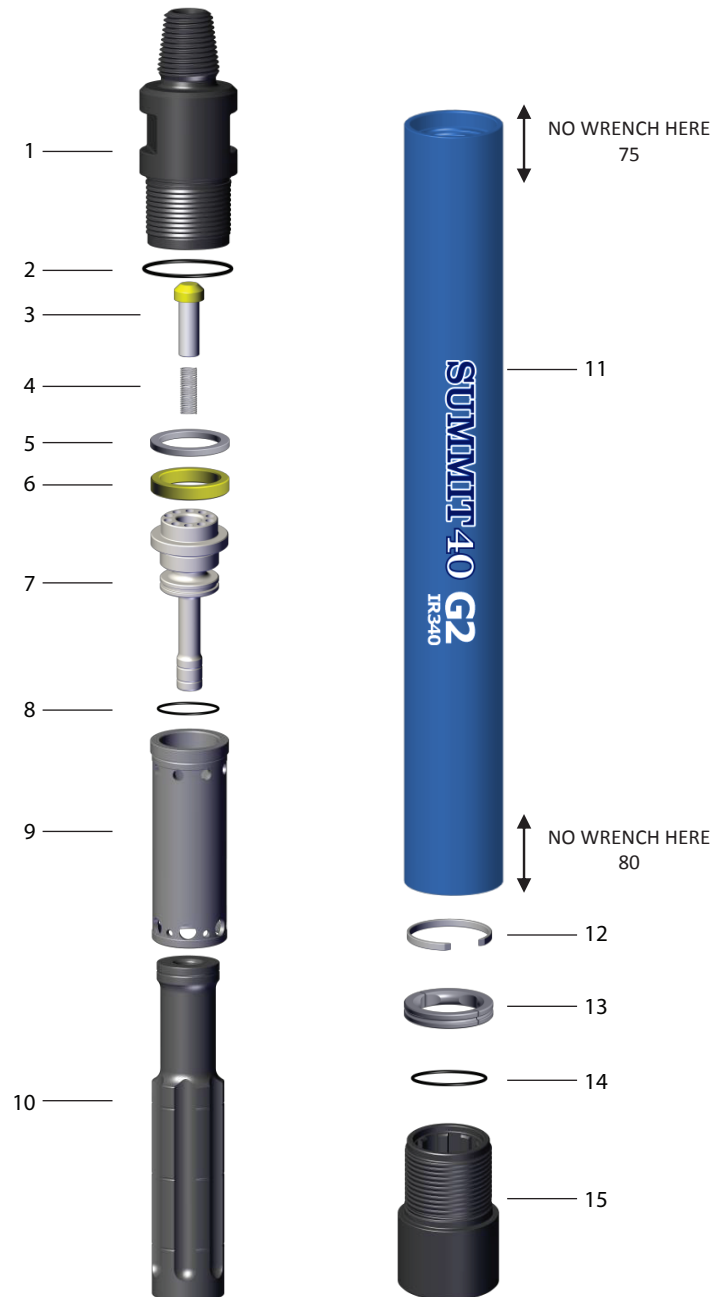

According to your request, the top sub can be made into two spanners, and come with protection buttons. An air controlling hole can be drilled on the valve to provide more efficient cuttings discharge.