



Technical Data

Shoulder to shoulder Length (Less Bit)	1081mm	42.56"
Weight (Less Bit)	61.5kg	136lbs
External Diameter	118mm	4.65"
Bit Shank	IR350	
Hole Range	130-152mm	
Connection Thread	API 3-1/2 Reg	

Air Consumption


PSI	C.F.M.	BAR	M ³ /min
150	310	10.3	8.7
200	421	13.8	12.0
250	530	17.2	15.0
300	646	20.7	18.5
350	760	24.1	21.5

Description

1	Top Sub (3-1/2 API Reg)
2	Top Sub O-ring
3	Check Valve
4	Check Valve Spring
5	Spacer Ring
6	Make Up Ring
7	Air Distributor
8	Air Distributor O-Ring
9	Cylinder
10	Piston
11	Case
12	Stop Ring
13	Bit Retainer Ring
14	Bit Retainer O-Ring
15	Driver Chuck

SUMMIT50 G2 IR350

DTH HAMMER SERIES  Pinnacle DRILLING PRODUCTS

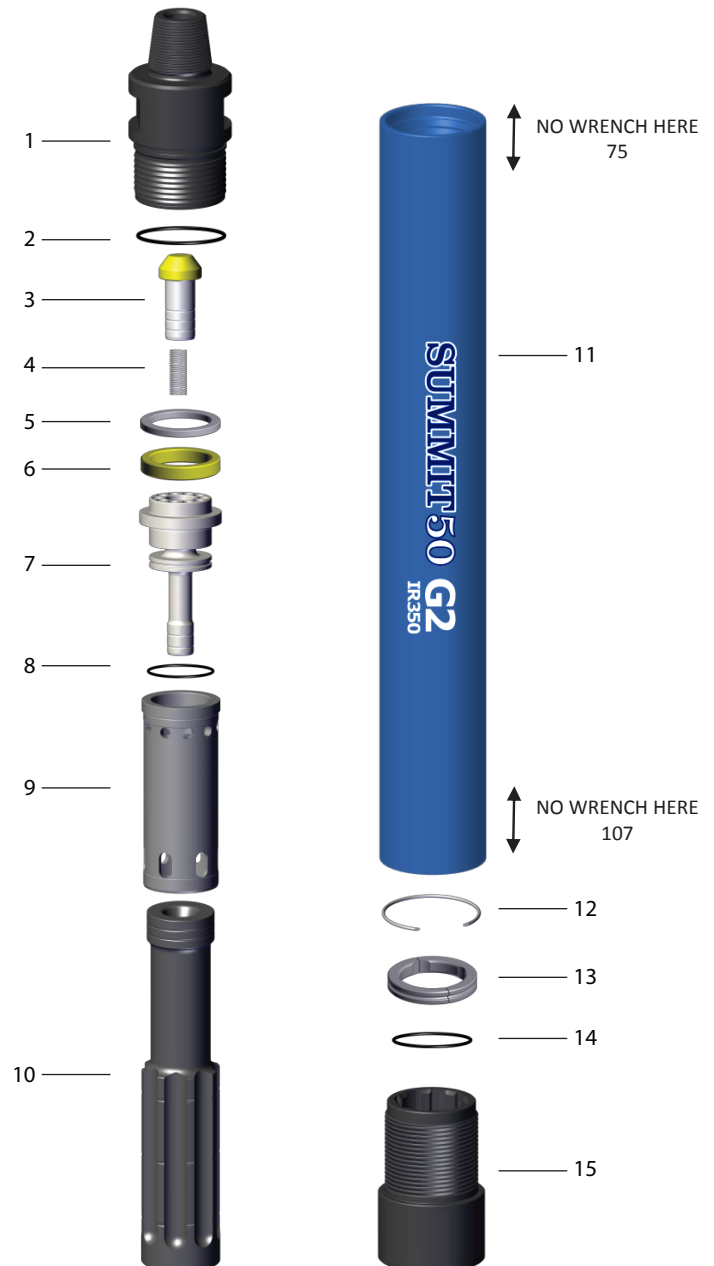

According to your request, the top sub can be made into two spanners, and come with protection buttons. An air controlling hole can be drilled on the valve to provide more efficient cuttings discharge.